

# AXXICON CHECK LIST FOR AIM MOULD BASE



[www.axxicon.com](http://www.axxicon.com)

Axxicon Quotation Number Q \_\_\_\_\_  
Revision Number \_\_\_\_\_


Company name \_\_\_\_\_ Date \_\_\_\_\_  
Country \_\_\_\_\_ Agent \_\_\_\_\_  
Contact Person \_\_\_\_\_ Contact Person \_\_\_\_\_  
Email \_\_\_\_\_ Email \_\_\_\_\_

MOULD BASE	HOLE PATTERN	BOLT SIZE	MACHINE DRAWING ATTACHED
<input type="radio"/> Horizontal <input type="radio"/> Vertical	<input type="radio"/> Euomap <input type="radio"/> SPI <input type="radio"/> Other: _____	<input type="radio"/> M12 <input type="radio"/> M16	<input type="radio"/> Yes <input type="radio"/> No


INJECTION MOULDING MACHINE	OPTIONS
<input type="radio"/> Machine type/brand _____ <input type="radio"/> Clamping Force _____ <input type="radio"/> Locating ring $\varnothing$ _____ mm <input type="radio"/> Ejector rod-Yes/No _____ <input type="radio"/> Min. shot volume _____ cm <sup>3</sup>	<input type="radio"/> Installation and Training € 90/hr + travel <input type="radio"/> Maintenance kit € .. <input type="radio"/> First aid kit € .. <input type="radio"/> Coupling kit € .. <input type="radio"/> Other _____

MOULD TEMPERATURE	RELEASE AND SECURE OF INSERTS
<input type="radio"/> 10-140 °C (Low temperature - water) <input type="radio"/> 140-200 °C (High temperature - oil)	<input type="radio"/> Mechanical locking system (standard) <input type="radio"/> Pneumatic cylinder

## EXAMPLE OF MACHINE PLATE DETAILS TO BE PROVIDED

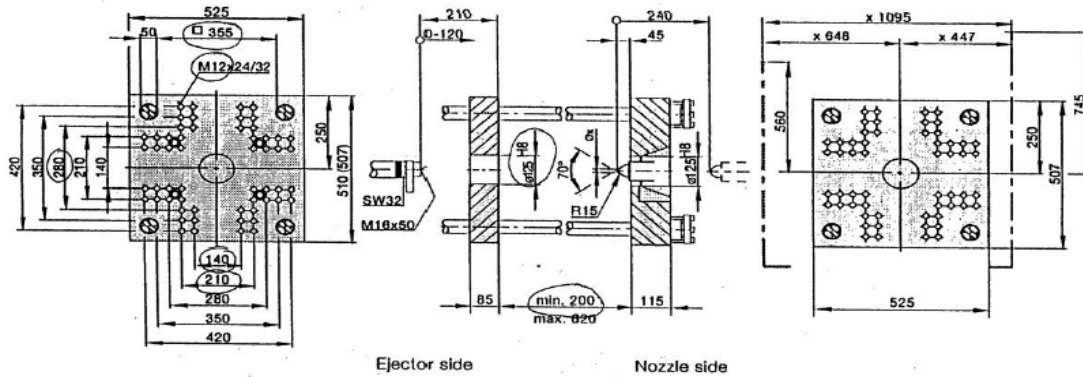

## NOZZLE REQUIREMENTS

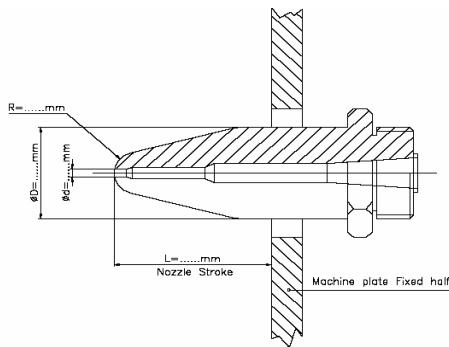

- Length nozzle stroke L \_\_\_\_\_ mm
- Radius of nozzle R \_\_\_\_\_ mm
- Outer diameter D  $\varnothing$  \_\_\_\_\_ mm
- Orifice diameter d  $\varnothing$  \_\_\_\_\_ mm

### REMARKS


Please return this data sheet to your local agent or to: [a.lavrijsen@axxicon.com](mailto:a.lavrijsen@axxicon.com) or [r.matulesy@axxicon.com](mailto:r.matulesy@axxicon.com)